BTX1 PRO S

Bluetooth®

**POCKET GUIDE**

Frequency: 2.4GHz
Max power: 100mW

ENGLISH
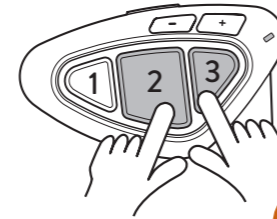
MIDLAND®

1

ON/OFF

POWER ON

3 SEC.

☀ Blue led flashing

🔊 Sound alert
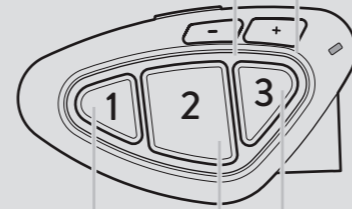
🔊 Operating mode status

POWER OFF

3 SEC.

☀ Red led flashing

🔊 Sound alert

PAIRING PROCEDURES

ALL PAIRINGS

Main pairing (music, voice)
ex:phone-TFT-GPS

Secondary pairing (voice)
ex: GPS, 2nd phone

Pairing to:
Midland unit
Different brand unit
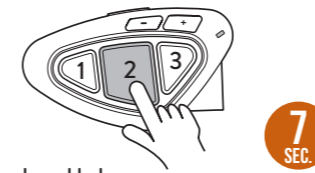
CONFERENCE

Pairing to:
Midland unit

CONFERENCE

Pairing to a
Midland unit
(passenger)

MUSIC SHARE   VOX

PROCEDURES

To enter Setup mode
Status: Power off

7 SEC.

☀ Steady red led

To exit Setup/interrupt the pairing
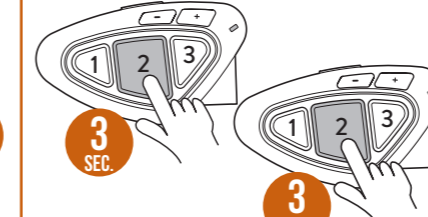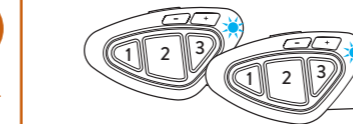

2 CLICK
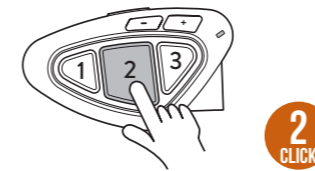
To reset the pairing
Status: Setup mode

3 SEC.

☀ Blue led lights up *and then switches*

☀ to steady red

PAIRING TO A MIDLAND UNIT

Status: both units must be in Setup mode

3 SEC.

3 SEC.

☀☀ Red/blue led blinks
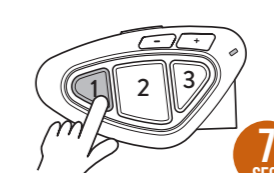
☀ Blue light on 1 sec

*Pairing successful*

☀ Then steady red light

Note: to pair another Midland unit, follow the same procedure but press buttons 1 or 3.

PAIRING TO A DIFFERENT BRAND UNIT

Status: Midland unit is in Setup mode

7 SEC.

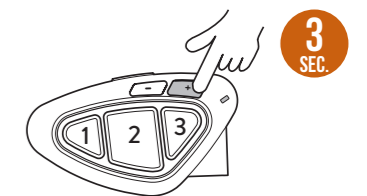☀☀ Red/blue led blinks **from fast to slow, keep pressed until the led blinks slowly**

From the other brand unit, start the "phone" pairing procedure.

*When both units stop flashing,*
Pairing successful!

PAIRING TO A PHONE/GPS

Status: Setup mode

3 SEC.

☀☀ Red/blue led blinks

MENU
Pairing
Midland BTX2
Pairing
Code: 0000

Searching Bluetooth device on your smartphone/GPS.
If required enter PIN code (0000).

☀ Blue led on 1 sec

Pairing successful

Note: to pair a second phone/GPS (in mono audio only!), follow the same procedure but press Vol- button.

FUNCTIONS

OPERATIVE MODES
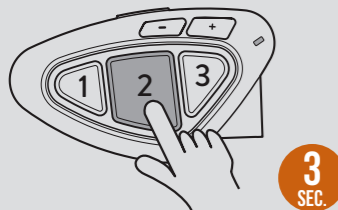
Intercom mode: talk to another unit.
Phone mode: calls or manage music.
**FM radio mode:** Listen, seek, store FM radio stations.

To change Operative mode
Status: Power on

To toggle from one mode to another one

3 SEC.

🔊 Voice announcement

INTERCOM MODE
PHONE MODE   FM RADIO MODE

INTERCOM MODE

To open/close intercom communication
Status: Intercom mode
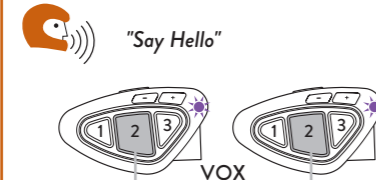

Purple led audio active

1 CLICK

🔊 Beep sound

Note: if you have another unit paired, press buttons 1 or 3 to open/close intercom.

To open Intercom using voice
Status: in all modes

🔊 "Say Hello"

VOX

To enable/disable Vox
Status: in all modes

7 SEC.
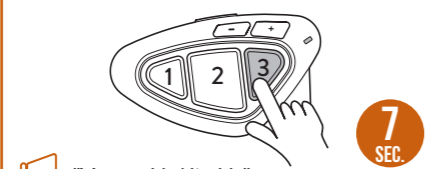
🔊 "Vox enable/disable"

To open Universal Intercom
Status: Intercom mode

Purple led audio active

3 SEC.

🔊 Beep sound

To close Universal Intercom
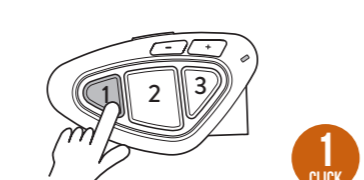
1 CLICK

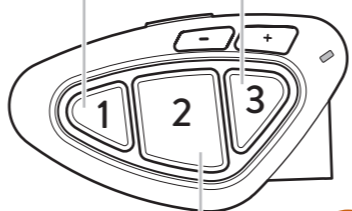**To enable/disable Conference**
Status: all modes

3 SEC.

3 SEC.

Note: The devices paired Vol+/- are temporary disconnected.

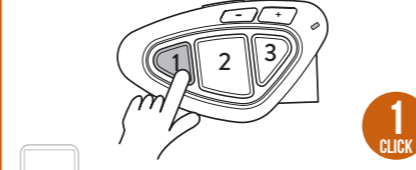**To open/close Conference communication**

Open/close to single unit

Open to all

1 CLICK

PHONE MODE

To make a phone call
Status: Phone mode

1 CLICK

*"Siri" (iPhone)
"Google assistant" (Android)*

To answer an incoming call

🔊 Say *"Hello"*
or

1 CLICK

1 CLICK   To close a call

3 SEC.   To reject a call

Note: if you have a 2nd phone paired on VOL- button, use Button 3

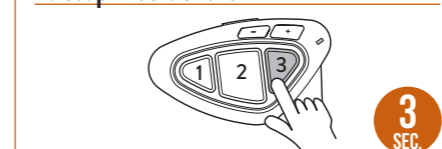**Listen to music**
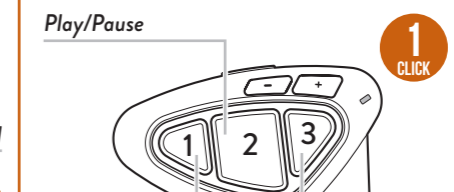*Status: Phone mode*

Select the app to play music.

Forward   Backward

Play/Pause

1 CLICK

To share music with the second unit

To play

1 CLICK

To share

3 SEC.
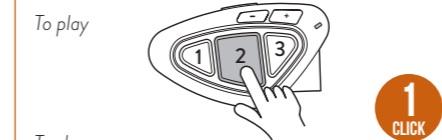
🔊 "Music share on"

🔊 Beep sound (confirmation)

To stop music share

3 SEC.

FM RADIO MODE

Status: FM radio mode

Play/Pause

1 CLICK

Seek up   Seek down

3 SEC.

Memory up   Memory down

Note: to save an FM Radio station use our application, our software or follow the procedure written in the user manual.

## SHORTCUTS

To play/pause music
Status: Intercom mode/FM radio mode

2 CLICK

To open Intercom
while listening to music and music share
Status: Phone mode

2 CLICK

Operative modes status reminder

1 CLICK

🔊 Voice annoncement

FOR MORE INFO VISIT:

www.midlandeurope.com

Watch tutorial video
Download software
Download application
Read complete manual instruction